




Digital optical UV VIS spectral probe NitraVis® for nitrate and suspended solids


Sensor with integrated ultrasonic cleaning for the reagent-free measurement of nitrate and suspended solids (optional) - optimized for municipal wastewater treatment systems

We would like to inform you about the application range on our website

NitraVis® 701 IQ (TS), NitraVis® 705 IQ (TS)

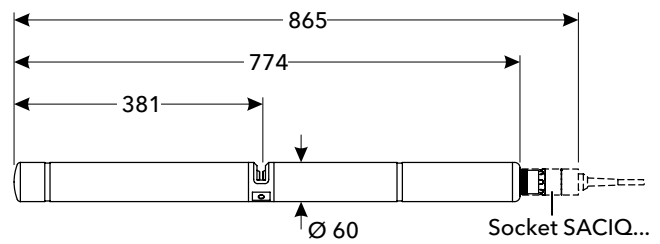

With shock protection:

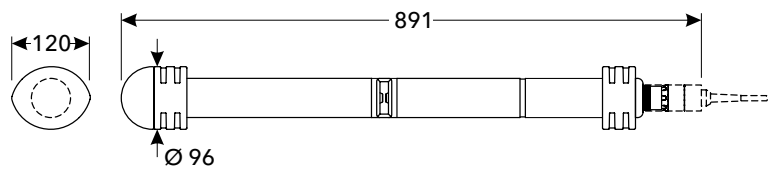

Technical Data

Model	NitraVis® 701 IQ	NitraVis® 705 IQ	NitraVis® 701 IQ TS	NitraVis® 705 IQ TS
Measuring method	Spectral Measurement in the UV-VIS Range (200 - 720 nm)			
Measuring gap (optical layer thickness)	1 mm	5 mm	1 mm	5 mm
Application (optimized for)	Municipal wastewater:	Municipal wastewater:	Municipal wastewater:	Municipal wastewater:
Measuring range and Resolution	Inlet:		Inlet:	
	NO ₃ 0.0 ... 300.0 mg/l 0.1 mg/l		NO ₃ 0.0 ... 300.0 mg/l 0.1 mg/l	
	NO ₃ -N 0.00 ... 60.00 mg/l 0.01 mg/l		NO ₃ -N 0.00 ... 60.00 mg/l 0.01 mg/l	
	Aeration:		Aeration:	
	NO ₃ 0.0 ... 300.0 mg/l 0.1 mg/l		NO ₃ 0.0 ... 300.0 mg/l 0.1 mg/l	
	NO ₃ -N 0.00 ... 60.00 mg/l 0.01 mg/l		NO ₃ -N 0.00 ... 60.00 mg/l 0.01 mg/l	
	TSS		TSS	
	Effluent:		Effluent:	
	NO ₃ 0.0 ... 750.0 mg/l 0.1 mg/l	NO ₃ 0.0 ... 250.0 mg/l 0.1 mg/l	NO ₃ 0.0 ... 750.0 mg/l 0.1 mg/l	NO ₃ 0.0 ... 250.0 mg/l 0.1 mg/l
	NO ₃ -N 0.0 ... 150.0 mg/l 0.1 mg/l	NO ₃ -N 0.00 ... 50.00 mg/l 0.01 mg/l	NO ₃ -N 0.0 ... 150.0 mg/l 0.1 mg/l	NO ₃ -N 0.00 ... 50.00 mg/l 0.01 mg/l
	TSS		TSS	
Accuracy (standard application muni. WWTP)	NO ₃ -N: ± 3 % of measured value ± 0.5 mg/l TSS: ± 5 % of measured value ± 50 mg/l			
Flow rate	≤ 3 m/s			
Pressure Resistance	Maximum 1 bar (incl. sensor connection cable)			
Electrical connections	2-wire shield cable with quick fastener to sensor			
Electromagnetic Compatibility	EN 61326, Class B, FCC Class A Intended for indispensable operation			
Certifications	CE			
Mechanical	Housing: Titan Grade 2, PEEK Window: Sapphire glass Protection class: IP 68			
Weight (without cable)	Approx. 8.82 lb (4 kg)			
Warranty	2 years for defects in quality			

Model	Description	Order No.
NitraVis® 701 IQ	Spectral nitrate probe for the measurement in inlet/aeration with integrated ultrasonic cleaning, multifunctional slide and shock-absorption-rings, without connecting cable (order SACIQ separately)	481044
NitraVis® 705 IQ	Like NitraVis® 701 IQ, but for measuring in the outlet	481046
NitraVis® 701 IQ TS	Spectral nitrate and suspended solids probe for measuring in the inlet/aeration with integrated ultrasonic cleaning, multifunctional slide and shock-absorption-rings, without connecting cable (order SACIQ separately)	481045
NitraVis® 705 IQ TS	Like NitraVis® 701 IQ TS, but for measuring in the outlet	481047

