




Digital optical UV spectral probe NitraVis® NI for nitrate and nitrite




Sensor with maintenance-free ultrasonic cleaning for measurement of nitrate and nitrite directly in the process – optimized for municipal wastewater treatment systems

We would like to inform you about the application range on our website

NitraVis® 701 IQ NI, NitraVis® 705 IQ NI

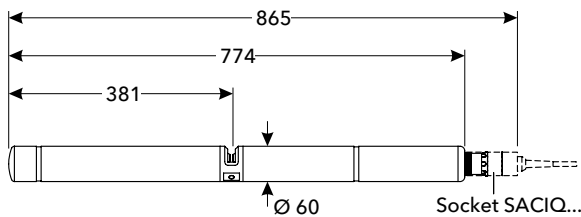

With shock protection:

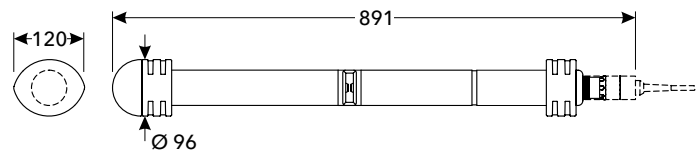

Model	NitraVis® 701 IQ NI	NitraVis® 705 IQ NI
Measuring method	Spectral Measurement in the UV Range (200–390 nm)	
Measuring gap (optical layer thickness)	1 mm	5 mm
Application (optimized for)	Municipal wastewater:	Municipal wastewater:
Measuring range and Resolution	Inlet & Aeration:	
	NO ₃	0.0 ... 300.0 mg/l 0.1 mg/l
	NO ₃ -N	0.00 ... 60.00 mg/l 0.01 mg/l
	NO ₂	0.0 ... 120.0 mg/l 0.1 mg/l
	NO ₂ -N	0.00 ... 30.00 mg/l 0.01 mg/l
	Effluent:	
	NO ₃	0.0 ... 750.0 mg/l 0.1 mg/l
	NO ₃ -N	0.0 ... 150.0 mg/l 0.1 mg/l
	NO ₂	0.0 ... 300.0 mg/l 0.1 mg/l
	NO ₂ -N	0.00 ... 75.00 mg/l 0.01 mg/l
Displayable Parameters	Up to 2 at the same time	
Accuracy (standard application muni. WWTP)	NO ₃ -N, NO ₂ -N: ± 3 % of measured value ± 0.5 mg/l	
Flow rate	≤ 3 m/s	
Pressure Resistance	Maximum 1 bar (incl. sensor connection cable)	
Electrical connections	2-wire shield cable with quick fastener to sensor	
Electromagnetic Compatibility	EN 61326, Class B, FCC Class A Intended for indispensable operation	
Certifications	CE, UKCA	
Mechanical	Housing: Titan Grade 2, PEEK Window: Sapphire glass Protection class: IP 68	
Weight (without cable)	Approx. 8.82 lb (4 kg)	
Warranty	2 years for defects in quality	

Model	Description	Order No.
NitraVis® 701 IQ NI	Spectral nitrate and nitrite probe for measuring in the inlet/aeration with integrated ultrasonic cleaning, multifunctional slide and shock-absorption-rings, without connecting cable (order SACIQ separately)	481056
NitraVis® 705 IQ NI	Like NitraVis® 705 IQ NI, but for measuring in the drain/outlet	481057

